

CETOP5 Monoblock with 3/4"G P-T ports on both short sides and A-B ports on back side. **Serial version**, with/without relief valve (FVLP-26)

Type 511

Model CMB511*-S*-6B-***

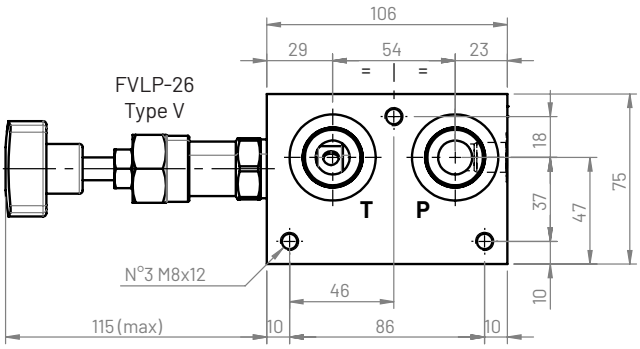

Positions	H (mm)	K (mm)	Aluminum (kg)	Cast iron (kg)
2	181	161	3,9	9,4
3	252	232	5,3	12,9

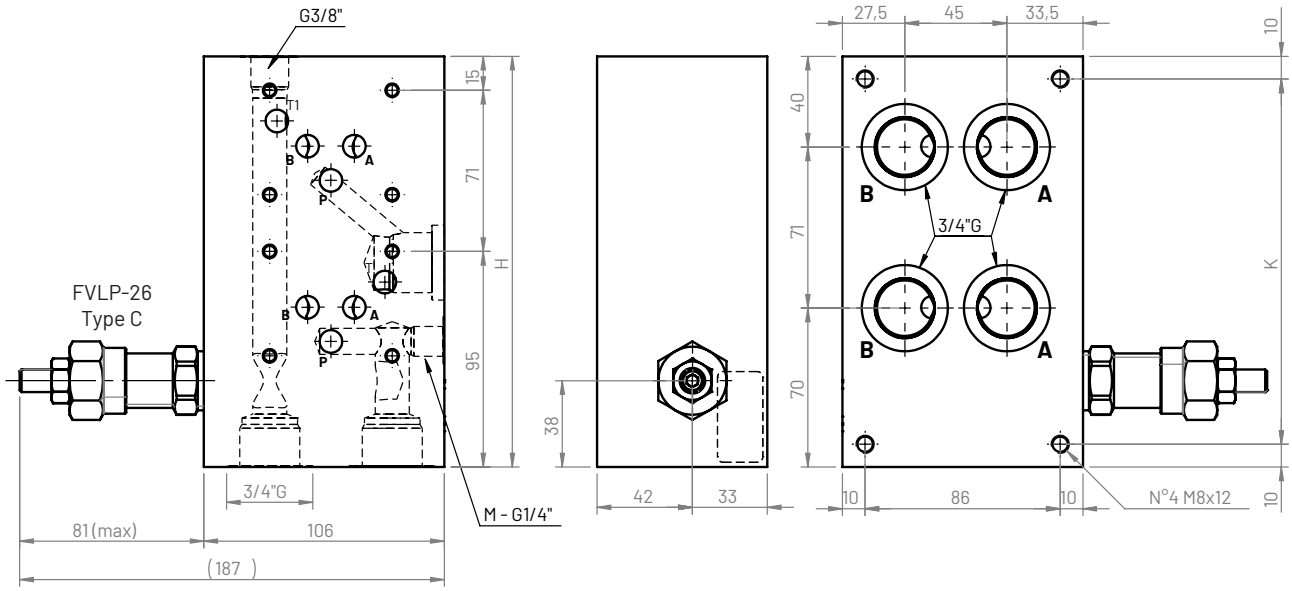

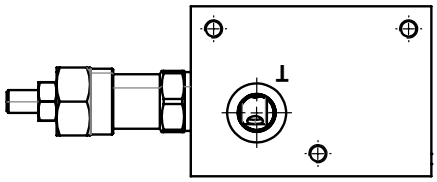

Hydraulic circuit

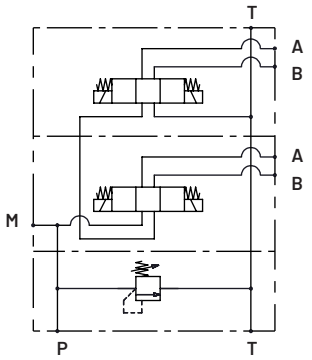

Ordering code CMB 5 11 * - S * - 6 B - * * *

Monoblock: **CMB**

Flange CETOP: **5**

Configuration type: **11**

Material:
G (Phosphated cast iron GJL250)
A (aluminum **EN AW-6026 LF** without anodization)
B (aluminum **EN AW-6026 LF** with neutral anodization)
Other materials on demand

Connection: **S** (series)

Positions: **2, 3**

Ports size:
6 (P-T: 3/4G - A-B: 3/4G)

Ports position: **B** (back side)

Cavity FVLP-26:
V (included) technical info → **p. 7.2**
T (with cavity plugged)
L (with cavity open)
N (without cavity)

Spring set (omit with L-T-N present):
W: 5-50 bar
X: 30-100 bar
J: 80-250 bar
K: 140-350 bar

Adjustment (omit with L-T-N present):
C (with screw)
V (with hand knob)